



TECHNICAL SPECIFICATION SHEET

ZDL7260LLSS / ZDL7260RLLSS

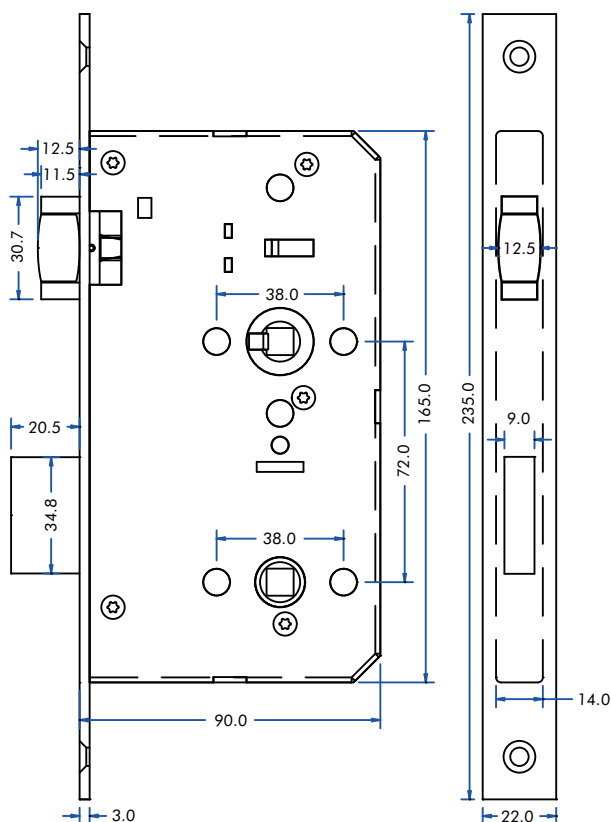

TYPICAL CONFIGURATION

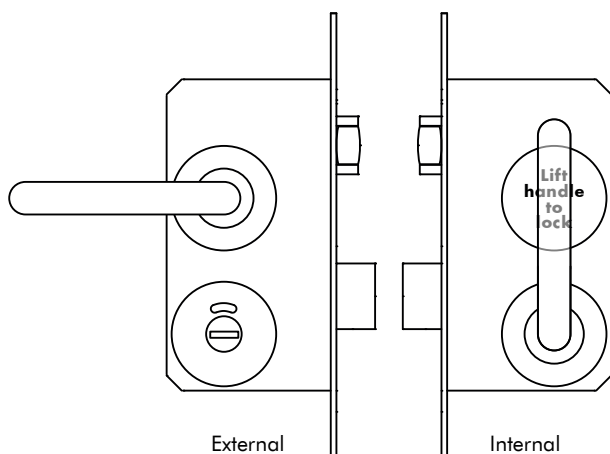

PRODUCT SPECIFICATIONS

- Available in 60mm backsets
- Adjustable roller latch bolt
- Case size (60mm backset) - 90 x 165mm
- Face plate - 235 x 22 x 3mm
- Stainless Steel latch bolt & dead bolt
- Includes grip tight follower spring
- Includes anti-rattle strike and dust box
- Available with square & radius forends
- All factory QC tested
- 10 year mechanical guarantee
- ZCS030LL complies with the design requirements of BS8300

THE ZDL7260LL WHEN USED WITH THE ZCS030LL OPERATES IN THE FOLLOWING MANNER

External / Outside access.


The roller latch bolt is operated externally with one half of the unsprung lever set, this release the roller latch bolt as normal. Underneath the lever is the release & indicator, this operates in the same manner as bathroom type coin releases.

Internal / Inside access.

The internal side of the lever set will be configured such that, the latch bolt is blanked off with a engraved covered escutcheon. The deadbolt features the second lever handle, and by throwing the handle up "extends the deadbolt" & locks the door. By turning the handle down the deadbolt is withdrawn, further downward action of the lever withdraws the roller latch bolt, allowing exit.

ZCS030LL SET INCLUDES:-

- 2 x ZCS030LL Lever Handles (Unsprung)
- 2 x 8mm Spindles
- Bolt Through Fixings
- Release Indicator
- "Lift Handle To Lock" Escutcheon

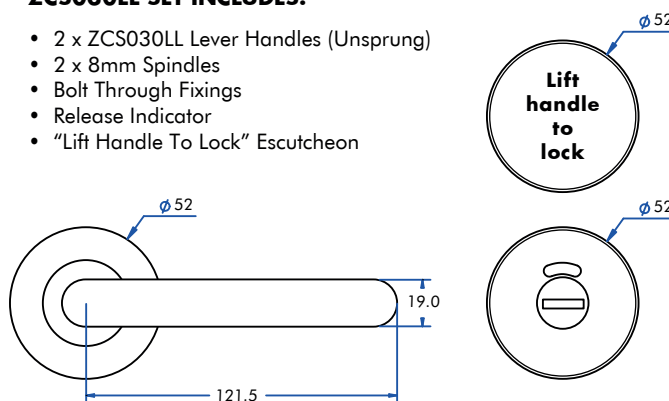

CODE	DESCRIPTION	FINISH	ADDITIONAL INFO.
ZDL7260LLSS	ZDL Din Lock Series - square profile	SS	Lift to lock function
ZDL7260RLLSS	ZDL Din Lock Series - radius profile	SS	Lift to lock function
 For more information please contact us today: Call: 01228 672900 Fax: 01228 672928 Email: sales@zoo-hardware.co.uk Web: www.zoohardware.co.uk ZOO Hardware Ltd, Unit B, Dukes Drive Kingmoor Park North, Carlisle, Cumbria CA6 4SH   URS is a member of Registrar of Standards (Holdings) Ltd.			